

不規則罐蓋塗膠乾燥機

IRREGULAR ENDS LINING-DRYING MACHINERY

S-A17A不規則罐蓋塗膠乾燥機，適用於各種方形、橢圓形之全自動塗膠乾燥機；不僅塗膠量可隨意控制，且絕無膠液污染罐蓋問題。並採用循環式電熱乾燥設備，不僅操作簡單、安全，且換型快速。誠屬不規則罐蓋線不可或缺生財設備。

S-A17A is built for irregular oblong ends lining and drying. With 2 sets mechanical lining gun and model cam to complete the lining compound on end.

Drying oven with electrical heater and vertical design to save space. Also with easy and quick adjustment to satisfy the requirement of modern can making.

S-A17A

Certified by

ISO-9001

Quality Assurance System



新 益


新益機械工廠股份有限公司
SHIN I MACHINERY WORKS CO., LTD.

不規則罐蓋塗膠乾燥機

IRREGULAR ENDS LINING-DRYING MACHINERY


優點：

- 使用兩組對稱塗膠機構，塗膠量之調整容易快速。
- 採用立式乾燥爐，佔地面積少。
- 為確保機械安全運轉，安全裝置完善。
- 乾燥爐內溫度可任意設定，且有自動溫度控制設置。
- 設計簡單，易於換型及保養。

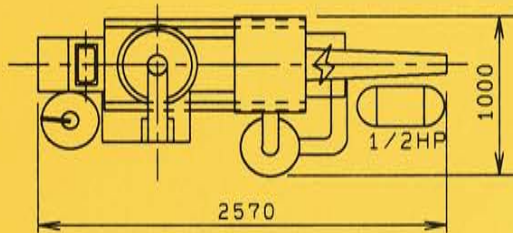

Features:

- With 2 sets mechanicalc lining gun for end compound lining, easy for volumn adjusting.
- Drying Oven is vertical design, hence save space.
- Safety devices provided to ensure M/C running safely.
- Auto temperature controller enable to adjust the best curing temperature.
- Easy adjustment and quick for can size change over.

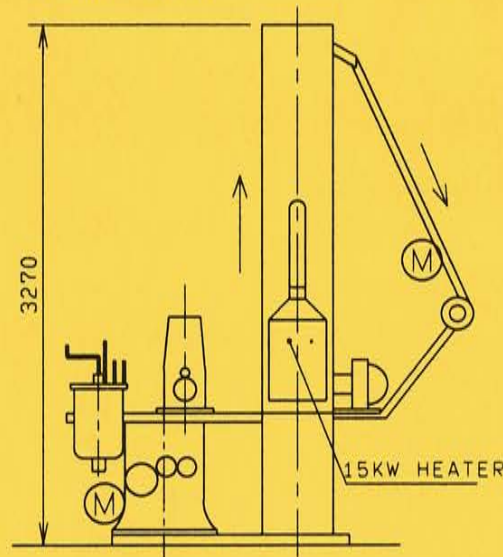

規格 SPECIFICATIONS:

機 型	S-A17A
罐 蓋 徑 範 圍 Range of end dia.	Min. 70L×58W mm, Max. 206L×142W mm
使 用 能 力 Capacity per minute	Up to 60 ends/min. (Depend to can size)
需 要 馬 力 Horse power required and 及 電 熱 Heater	主 馬 達 Main motor 1 HP × 1 罐蓋排出馬達 End discharge motor 1/8 HP × 2 強力吹風機 Blower 1/2 HP × 1 電 熱 Heater 15KW
需要壓縮空氣 Compressed Air Required	1kg/cm ² × 10L/Min.
安裝面積及高度 Floor Space Overall Height	2570×1000×3270mm
淨 重 Net Weight (approx.)	1300 kgs

※規格如有變更，恕不另通知 Subject to change without notice.

TEL:886-(04)-2623-8181
FAX:886-(04)-2623-2129

新益機械工廠股份有限公司

台灣省台中縣清水鎮光華路2號

SHIN I MACHINERY WORKS CO., LTD.

NO.2 KUANG HWA ROAD CHING-SHUI TAICHUNG,

TAIWAN, R. O. C.

TEL: (04) 622-4166

FAX: (04) 623-2129

TELEX: 51240 SHINI

經銷商：

AGENT: