

自動立式角罐罐胴反邊機

AUTOMATIC VERTICAL SQUARE CAN FLANGER

S-B42V自動立式角罐罐胴反邊機採用立式設計。罐身由鏈條推罐器帶入罐身轉盤，經由擠壓式反邊模反邊成型。反邊好之罐身再由轉罐盤帶出並由推桿推出。使用變頻器作無段變速控制。浸油式自動循環潤滑系統及多重安全設計，使維修保養容易且換型簡便快速。


S-B42V Automatic Vertical Square Can Flanger with vertical design. Expanded can is carried into an index turret by a chain pusher. Can is flanged by a pair of squeeze flanging die. Flanged can is carried out by the index turret and is pushed away by a lever. Equipped with inverter for variable speed control. With recycleable centralized lubricating system and multiple safety devices, easy for maintenance and can size changeover.

S-B42V

Certified by

ISO-9001

Quality Assurance System

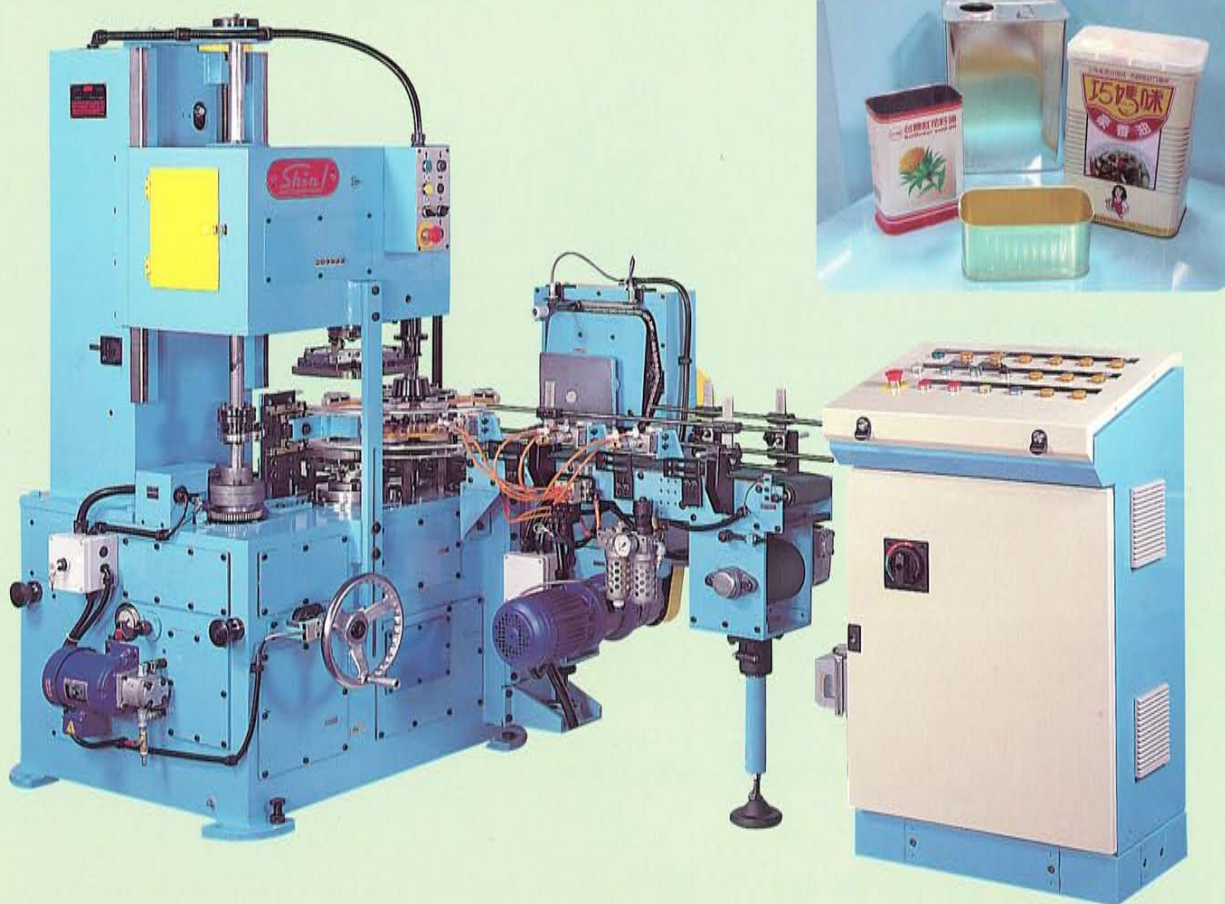

新益機械工廠股份有限公司
SHIN-I MACHINERY WORKS CO., LTD.

自動立式角罐罐胴反邊機

AUTOMATIC VERTICAL SQUARE CAN FLANGER


特點：

- 結構堅固，適合各種尺寸之方形及矩形罐反邊。
- 採用立式設計，容易與自動封罐機連線使用。
- 反邊模採用高級合金鋼製作，堅固耐用。
- 與罐身接觸面均鍍硬鉻處理以避免擦傷。
- 罐高調整使用馬達帶動，方便快捷。
- 安全設計完善，確保機台與人員安全。



FEATURES:

- Sturdy structure, suitable for various square/rectangular can flanging.
- Vertical design, easy to link and work with an auto seamer.
- Tooling is made of special alloy steel and be heat treated.
- Can guide and turret are hard chromium plated to avoid scratch.
- Can height adjustment through a motor, convenient and quick.
- Multi-safety design for machine and personnel safety.

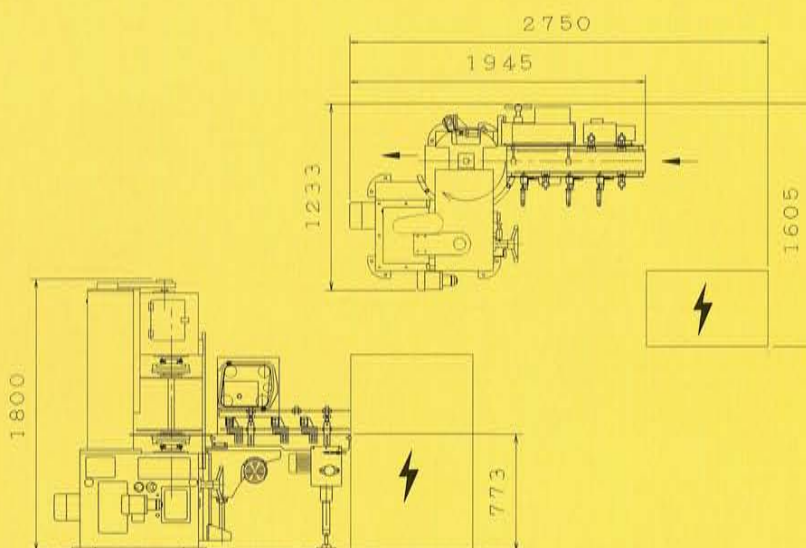

規格 (Specification):

機 型 MACHINE TYPE	S-B42V
適 用 罐 身 Range of can dimensions	50×95 ~ 180×180 mm
罐 身 對 角 線 Can diagonal	60 ~ 250 mm
適 用 罐 高 Range of can height	40 ~ 400 mm
每 分 鐘 產 能 Capacity per minute	Up to 60 CPM ; Depending on can shapes, size
需 要 馬 力 Horse power required	2Hp×1 , 1/4Hp×1
淨 重 Net weight (approx.)	1800 kgs
安裝面積及高度 Floor space overall height	2750L×1600W×1800H mm

* 規格如有變動，恕不另通知。 Subject to change without notice.

新益機械工廠股份有限公司
SHIN-I MACHINERY WORKS CO., LTD.

台灣省台中縣清水鎮清水里中正街43號
NO.43 CHUNG-CHENG STREET, CHING SHUI, TAICHUNG, TAIWAN.
TEL:886-(04)2623-8181 FAX:886-(04)2623-2129

Web address: <http://www.shinican.com>

E-mail: shinican@ms15.hinet.net

經銷商：
AGENT：