

自動封罐機

AUTOMATIC DOUBLE SEAMER

本機採用第一捲輪，第二捲輪分開式之兩個捲封頭，每一捲封頭附 4 個捲封輪，故捲封效果極佳，速度高達 40 罐 / 分，本機送罐及送蓋採分開式，送罐用空壓汽缸推送，出罐用連桿推出，進出罐精確，減少空罐壓擠損傷，送蓋採磁鐵連桿帶動方式，送蓋順暢。升罐座彈簧壓力可由上部調整，故調整簡易，操作容易。

S-B43A

This machine adopts two seaming heads of which the 1st & 2nd. Seaming operation are separated. Each Seaming Head has four Seaming Rolls. So it can seam effectively and with capacity up to 60 cans per minute.

The feeding of can bodies and of ends are in a separate form. The can feeding is operated by an Air Cylinder, hence precise timing adjustment can be achieved. The ends feeding is operated by a magnetic lever. The spring pressure of Lifter can be adjusted from the upper part. It's easy to adjust and operate. These devices keep the cans and ends from jam and damage.

Certified by

ISO-9001

Quality Assurance System



Shin I

新益

新益機械工廠股份有限公司
SHIN I MACHINERY WORKS CO., LTD.

自動封罐機



AUTOMATIC DOUBLE SEAMER

特點：

- 附進罐送蓋用電眼自動控制停車裝置
- 可用無捲緣罐蓋
- 附多項自動停車裝置
- 更換罐型簡便

Features:

- Adopt Automatic controllers for can bodies and ends feeding.
- Apply to the ends without curling.
- Adopt various automatic stop devices.
- Easy to change for different can sizes.

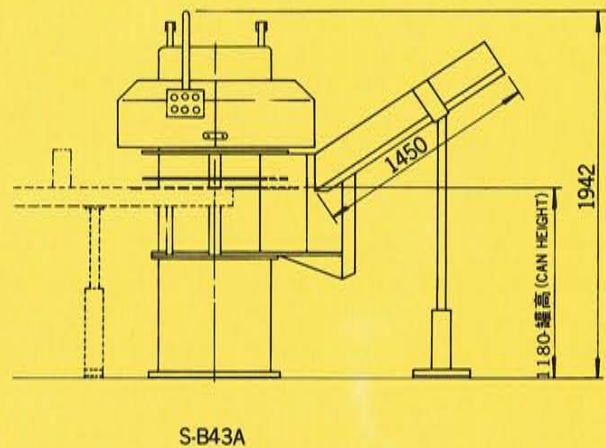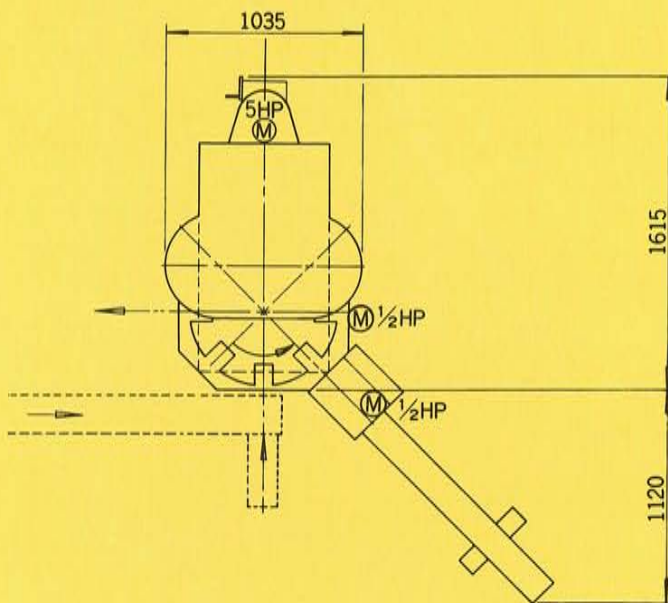

規格 (Specifications) :

機 型	MACHINE TYPE	S-B43A
適用方罐對角徑	Range of can diagonal	60-250 mm
適用罐高	Range of can height	40-400 mm
每分鐘產能	Capacity per minute	Up to 40 cans ; Depending on can shapes, size.
需要馬力	Horse power required	
主馬達	Main motor	5 HP x 1
送蓋馬達	Cover feeding	1/2 HP x 1
托罐傳動馬達	Can lifter driving	1/2 HP x 1
安裝面積及高度	Floor space overall height	2735L x 2050W x 1945H mm
淨重	Net weight(approx.)	2500 kgs

※ 規格如有變更，恕不另通知 Subject to change without notice.

新益機械工廠股份有限公司
SHIN I MACHINERY WORKS CO., LTD.

台灣省台中縣清水鎮清水里中正街43號
NO.43 CHUNG-CHENG STREET, CHING SHUI, TAICHUNG, TAIWAN.

TEL:886-(04)223-8181 FAX:886-(04)223-2129

Web address: <http://shinican.com.tw>

E-mail: shinican@ms15.hinet.net

TEL:886-(04)-2623-8181
FAX:886-(04)-2623-2129

經銷商：
AGENT：