高速罐蓋生產設備

HIGH SPEED END LINE EQUIPMENT

Shin I

新益

新益機械工廠股份有限公司

SHIN I MACHINERY WORKS CO., LTD.

機械配置流程圖
PRODUCTION LINE LAYOUT

主要設備：

MAIN EQUIPMENTS:

S-B58-1 自動棧板式鐵皮供料機
Automatic Strip Feeder

S-B58 自動多模冲蓋機
Automatic Multiple Dies Press

S-B58C 自動雙輪捲緣機
Automatic Double Curling Mahcine

S-B63 自動塗膠機
Automatic Lining Machine

S-B63-3 自動罐蓋計數集蓋裝置
Automatic Can End Counter & Stacker

連接各機種間之輸送設備
Conveyor System Between All Equipments

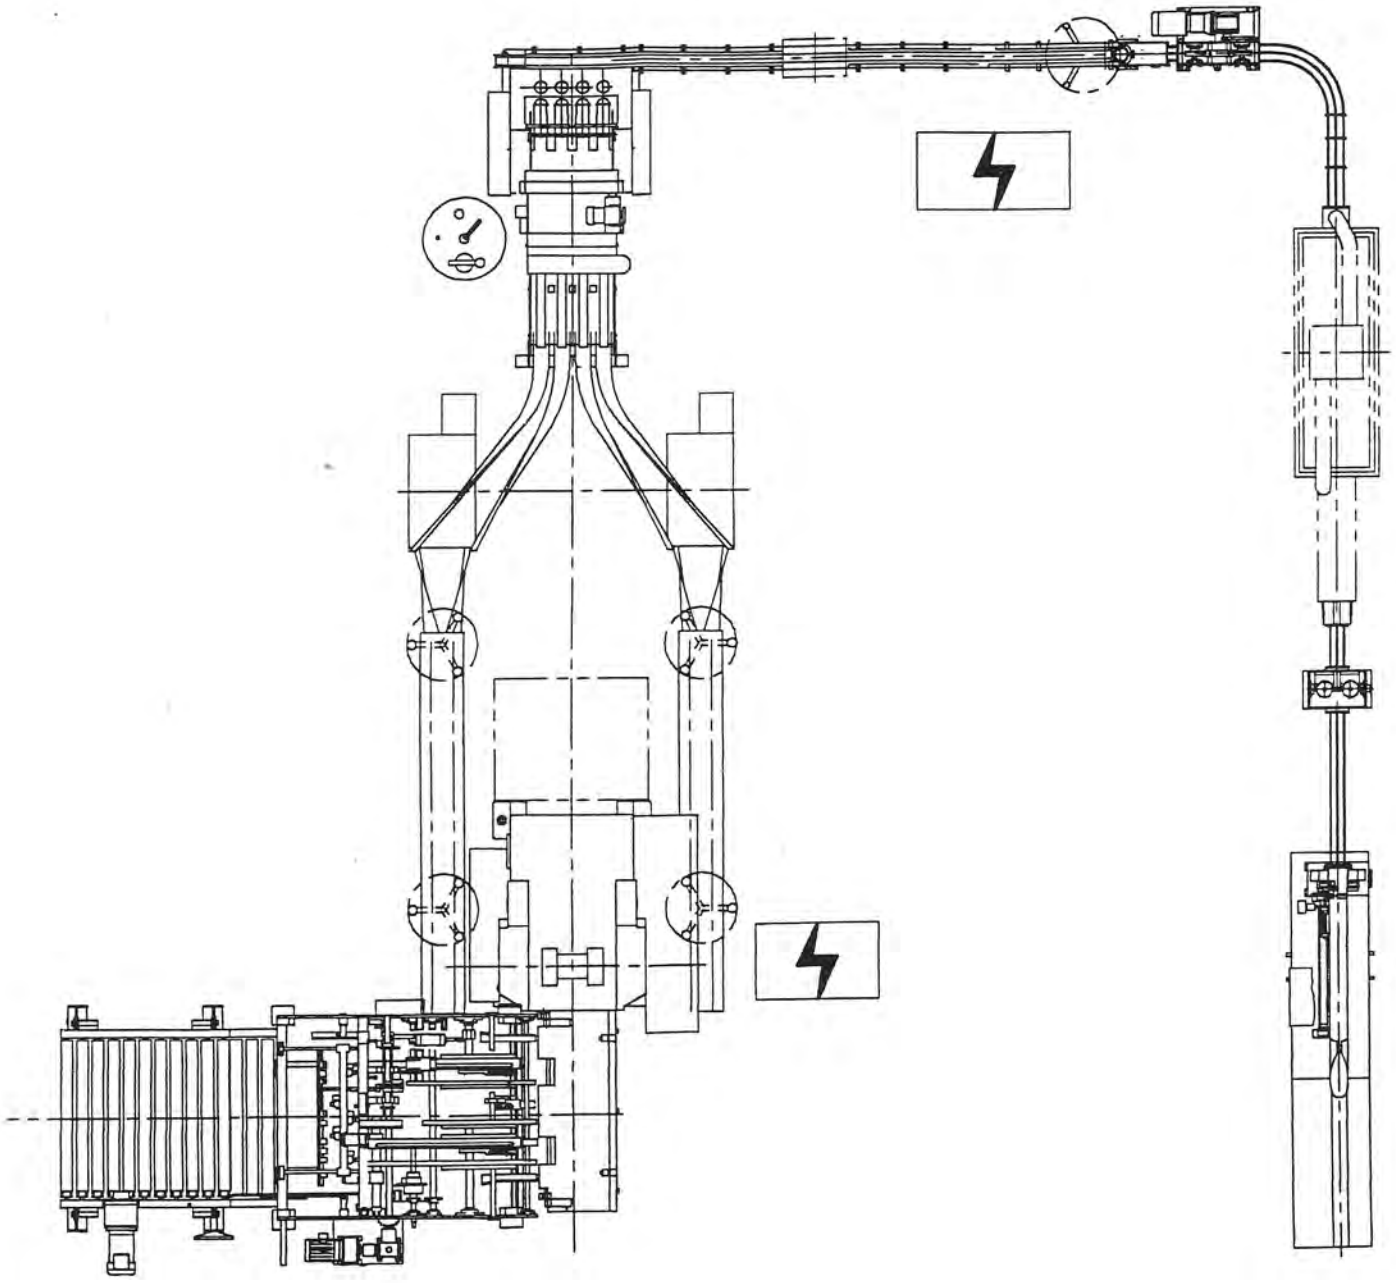

註：全線配置方式可依客戶場地之不同而設計

Production Line Layout can be modified to fit customer's factory

S-B58 自動多模冲蓋機
AUTOMATIC MULTIPLE DIES PRESS

S-B58係四模冲蓋機，適用範圍極廣，由200D～307D 均能適用。適合大量生產線需求。不論馬口鐵或鋁皮，不論直邊鐵皮或波形鐵皮，均能適用。

冲模由特殊合金鋼製成，堅固耐用佳評不斷。配置多重安全設計以提高人、機安全；加上同步排蓋設計，不僅調整簡單且提高冲蓋機之產能。

本機與S-B58-1自動送料機連接，不僅更可以節省人力，提高冲蓋機之產能。

S-B58 Automatic Multiple Dies Press is built for end forming and pre-curling. Adaptable design for steel or aluminum sheet; Either straight or scrolled strip can be used, the four dies tooling capac city up to 1200 ends per minute. With high safety provision for personnel engaged in production, setting and maintenance activities. S-B58 satisfies the requirement of modern can making.

特　點：

- 冲床之起動採用雙手起動方式，符合安全規定，確保操作安全。
- 使用大型空氣離合剎車器，動力傳送確實穩定。
- 安全設計完善，確保機台及人員安全。
- 換型容易快速，節省時間。

Features:

- **With duplex switch for machine starting, safe and reliable.**
- **With Air Clutch for power transmission, effective but low maintenance.**
- **Multi-safety design for machine and personnel safety.**
- **Easy for can size changeover and adjust.**

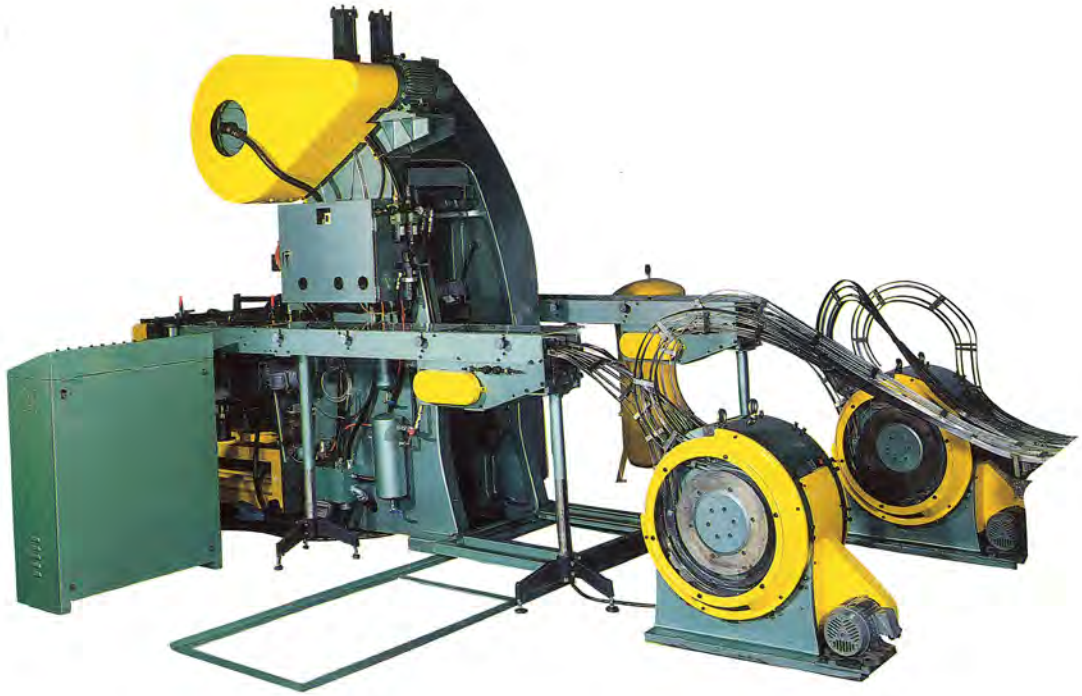

規格：**(Specifications):**

機　　種	**MACHINE TYPE**	**S-B58**	**S-B63**
適用罐蓋直徑	Range Of End Dia.	200～307D (H≦6.5MM)	
每分鐘產能	Capacity Per Minute	200～211D up to 1200 PCS 212～301D up to 1000 PCS 302～307D up to 800 PCS	
需要馬力	Horse Power Required	10 HP, 1/4 HP	3 HP X 2, 1/4 HP
需要壓縮空氣	Compressed Air Required	120L/Min. X 6 Kg/Cm²	20L/Min. X 4 Kg/Cm²
適用鐵皮長度	Range Of Strip Length	550～910mmL	
適用鐵皮寬度	Range Of Strip Width	240～360mmW	
最大沖模高度	Max. Die Height	320mmH	
安裝面積及高度	Floor Space Overall Height	300 X 1690 X 2970mm	1300 X 1200 X 1420mm
淨　　重	Net Weight (approx)	8400kgs	1740kgs

機　　種	**MACHINE TYPE**	**S-B58-1**	**S-B58C**
適用罐蓋直徑	Range Of End Dia.		200～404D
每分鐘產能	Capacity Per Minute	Depending on S-B58	
需要馬力	Horse Power Required	1/2HP X 3, 1 HP X 1	1 HP X 1
需要壓縮空氣	Compressed Air Required	20L/Min. X 3 Kg/Cm²	
適用鐵皮長度	Range Of Strip Length	710～1060mmL	
適用鐵皮寬度	Range Of Strip Width	240～365mmW	
安裝面積及高度	Floor Space Overall Height	2200 X 1900 X 1800mm	110 X 510 X 940mm
淨　　重	Net Weight (approx)	1910kgs	610kgs

機　　種	**MACHINE TYPE**	**S-B63-3**
罐蓋徑範圍	Range of end dia.	200～404D
每分鐘產能	Capacity Per Minute	Upto 1200ends/min.
需要馬力	Horse Power Required	1/4 HP X 2
需要壓縮空氣	Compressed Air Required	10L/Min. X 3 BAR
淨　　重	Net Weight (abt)	650 KGS
安裝面積高度	Floor Space Overall Height	2200 X 650 X 1550 mm

規格如有變更，恕不另通知 Subject to change without notice.

新益機械工廠股份有限公司

台灣省台中縣清水鎮光華路２號

SHIN I MACHINERY WORKS CO., LTD.

NO.2 KUANG HWA ROAD CHING-SHUI TAICHUNG, TAIWAN, R. O. C.

TEL:(04) 622–4166　　FAX:(04) 623–2129

TELEX: 51240 SHINI

Web address: http://shinican.com.tw

E-mail: shinican@ms15.hinet.net

經銷商：
AGENT: