

自動不規則罐假封真空封罐機

AUTOMATIC IRREGULAR CAN VACUUM SEAMER WITH CLINCHER

S-C86 自動不規則罐假封真空封罐機適用於不規則食品罐之捲封。充填好之罐身由分罐螺桿及轉罐盤帶入，與分割刀分離罐蓋會合，經由二只假封捲輪及假封軋頭將食物壓下及將罐身緣與罐蓋壓合(假封)。罐身經由轉罐盤及鏈條帶入真空捲封站之六孔真空轉罐盤，於真空室內托罐盤將罐身托起，由四只捲輪執行捲封工作。捲封後之罐身由轉罐盤帶出。不鏽鋼捲封頭構造簡單，每一捲輪由獨立捲封凸輪控制進出時間，成形凸輪引導捲輪依罐身外型旋轉，軋頭座附微調機構，調整容易，捲封品質符合國際標準。構造簡單及多重安全設計，操作及保養容易。

S - C86 Automatic Irregular Can Vacuum Seamer with Clincher is specially designed for irregular can closing under vacuum. Filled can is fed forward through a timing screw and a turret to meet with end. Clinching chuck and two clinching rollers push food down and clip end and can body together. Then, clinched can is carried by a turret and chain to enter a pocket of vacuum turret, with six pockets, in vacuum seaming station. Lifter plate lift can up into vacuum chamber. Four seaming rollers undertake seaming operation. A concise seaming head with adjustable chuck set, make seaming quality meet international standard. Each seaming arm is controlled by an individual seaming cam and a copy disc is to guide rollers turn accordingly. Simple structure and multiple safety devices, easy for operation and maintenance.

S-C86

Certified by

ISO-9001

Quality Assurance System



Shin-I
新益


新益機械工廠股份有限公司
SHIN-I MACHINERY WORKS CO., LTD.

自動不規則罐假封真空封罐機

AUTOMATIC IRREGULAR CAN VACUUM SAEMER WITH CLINCHER


特點：

- 機台結構堅固，適用於各種不規則罐之捲封。
- 裝有假封滾輪有壓實物及結合罐蓋與罐身功用。
- 附設自動罐蓋打號機，可免另設一部打號機又可減少人工。（打號機為選配）
- 捲封滾輪用凸輪控制進退，捲封均勻容易調整。
- 捲封頭結構精巧輕便，操作容易檢修迅速。
- 附電眼式無罐無蓋及送蓋異常自動停機裝置。

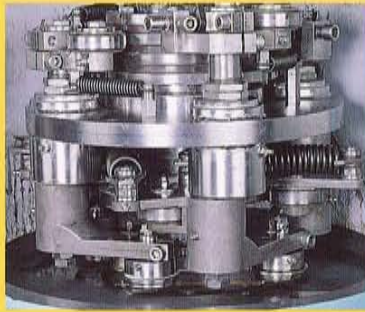

FEATURES:

- Very sturdy structure of machine, suitable for irregular can seaming.
- with rotary clincher for food product push down and clinch each cover to its can.
- Seaming rolls movement is operated by cam, hence makes seam even cover & perfect.
- Easy accessibility for maintenance.
- Simple mechanism and easy to operate.
- Wide range for different can sizes & shapes.
- With electronic No and No cover (NCNC) and cover feeding error auto stop device.
- With cover marker for maximum of triple row and seven characters (cover marker is optional)

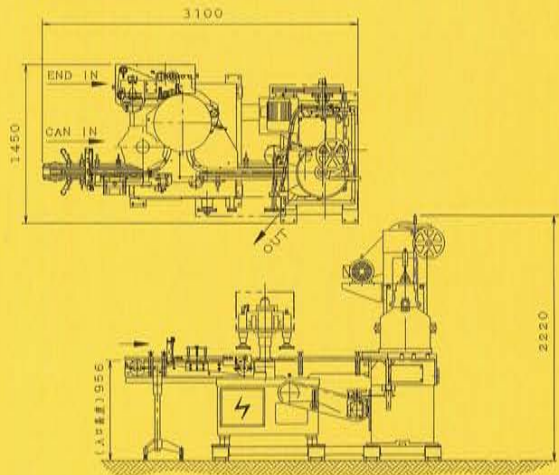

規格 (Specification):

機 型	MACHINE TYPE	S-C86
適 用 罐 身	Range of can dimension	45 ~ 170 mm length, width
適 用 罐 高	Range of can height	22~100 mm
最大罐對角線	Maximum can dia.	UP to 175 mm
每 分 鐘 產 能	Capacity per minute	Up to 60 CPM Depending on can shapes size.
需 要 馬 力	Horse power required	3 Hp x 1
淨 重	Net weight (approx.)	3040 kgs
安裝面積及高度	Floor space overall height	3100L x 1450W x 2200 Hmm

* 規格如有變動，恕不另通知。 Subject to change without notice.

新益機械工廠股份有限公司

SHIN-I MACHINERY WORKS CO., LTD.

台灣省台中縣清水鎮清水里中正街43號
 NO.43 CHUNG-CHENG STREET, CHING SHUI, TAICHUNG, TAIWAN.
 TEL:886-(04)2623-8181 FAX:886-(04)2623-2129

Web address: <http://www.shinican.com>

E-mail: shinican@ms15.hinet.net

經銷商：
AGENT：