

自動全開罐蓋補漆乾燥機

Automatic F.O.E. Repair- Drying Machine

S-B10RP 自動全開罐蓋補漆乾燥機係針對食品用全開蓋將逐漸為業界採用之趨勢所研發而成之全開蓋切口環處噴塗保護漆膜之設備。採用 NORDSON 無氣噴漆系統，及電熱循環乾燥爐，不僅操作簡單容易，且換型快速。


S-B10RP

S-B10RP Automatic F.O.E. repair and drying machine is designed for tinplate full-open ends' lacquer repairing to prevent rust occurred on the scoring line. With NORDSON airless spray system and electrical heater for easy and safety operation.

Certified by

ISO-9001

Quality Assurance System

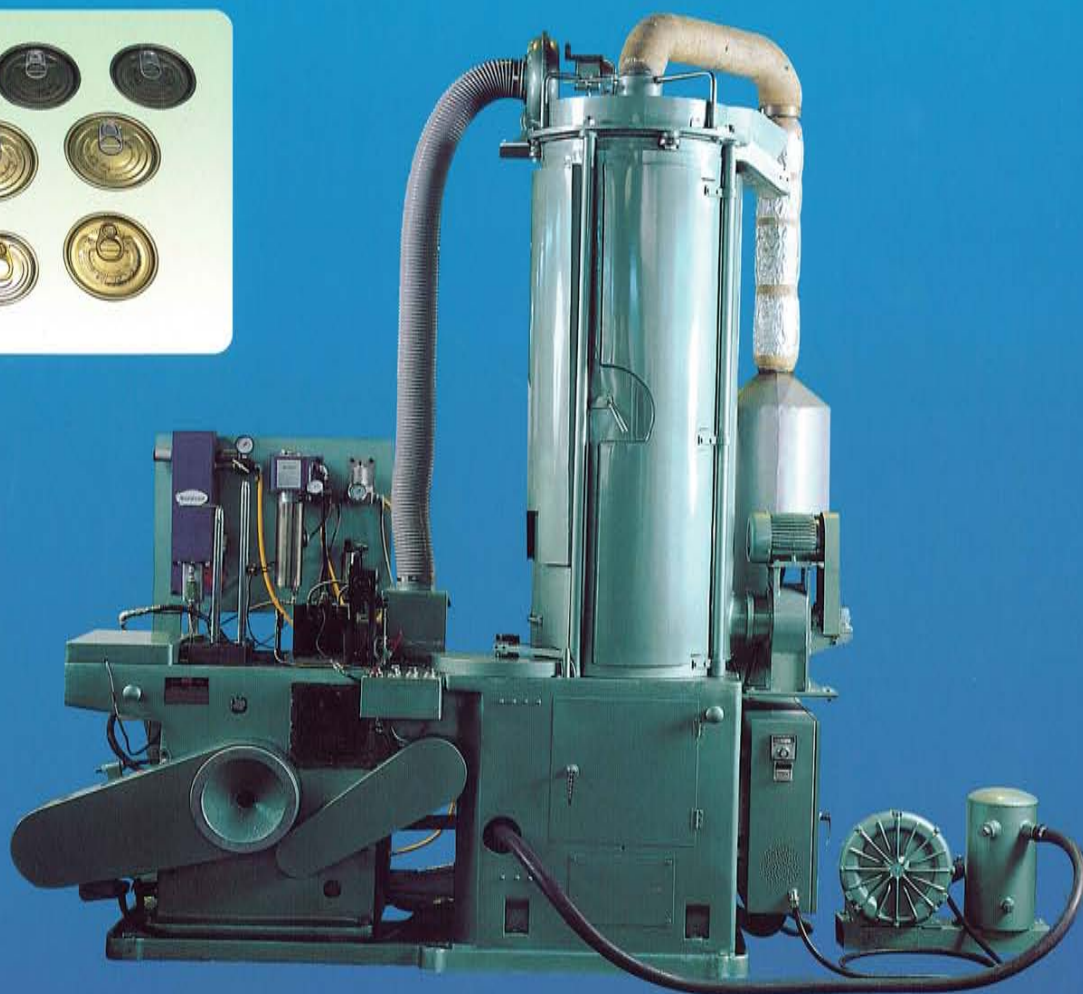


新益機械工廠股份有限公司
SHIN-I MACHINERY WORKS CO., LTD.

自動全開罐蓋補漆乾燥機

Automatic F.O.E. Repair- Drying Machine


特點：

- 使用 **NORDSON** 單噴嘴，噴漆量之調整容易快速，下軋頭轉速變頻器控制。
- 採用立式乾燥機，佔地面積少。
- 為確保機械安全運轉，安全裝置完善。
- 乾燥爐內溫度可任意設定，而且有自動溫度控制器來保持所設定之溫度。
- 更換部份零件後即可適用於不同直徑罐蓋外部或內部噴漆。
- 能配合自動計數集蓋機 **S-B10A-5** 使用，降低人工成本。

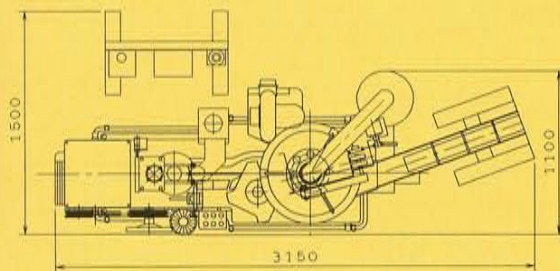

FEATURES:

- With **NORDSON** airless spray system for lacquer coating, easy to adjust the film volume of lacquer. Lower chuck turning speed is controlled by inverter.
- Drying Oven is vertical design, hence save space.
- Safety device provided to ensure M/C running safely.
- Automatic temperature controller enable to adjust the curing temperature of oven between 100-150 C.
- Suitable for end inside or outside face coating.
- Recommended to link with auto end counter and stacker **S-B10A-5** to save labor cost.

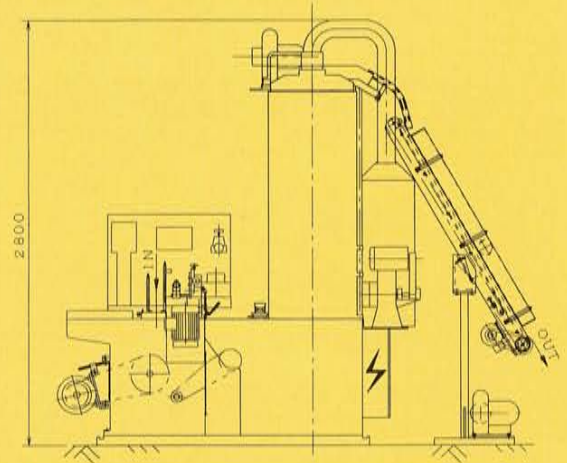

規格 (Specifications):

機 型	MACHINE TYPE	S-B10RP
適用 罐 蓋 範 圍	Range of end dia	200~404 D
每 分 鐘 產 能	Capacity per minute	Up to 250 cpm, depending on end size
需要馬力及電熱	Horse power required and Heater	A) 主 馬 達 Main motor 1 pc X 3 HP B) 罐 蓋 排 出 馬 達 End discharge motor 1 pc X 1/8 HP C) 強 力 吹 風 機 Blower 2 pcs X 1/2 HP D) 強 力 吹 風 機 Blower 1 pc X 2 HP E) 電 熱 Heater 15kw
需要壓縮空氣	Compressed air required	5kg/cm ² X 50L/Min.
安裝面積及高度	Floor space overall height	2400L X 1500W X 2800H mm
淨 重	Net weight (approx)	2400 kgs

※規格如有變更，恕不另通知 Subject to change without notice.

新益機械工廠股份有限公司
SHIN-I MACHINERY WORKS CO., LTD.

台灣省台中縣清水鎮清水里中正街43號
NO.43 CHUNG-CHENG STREET, CHING SHUI, TAICHUNG, TAIWAN.
TEL:886-(04)2623-8181 FAX:886-(04)2623-2129

Web address: <http://www.shinican.com>

E-mail: shinican@ms15.hinet.net

經銷商：
AGENT：