

自動立式罐胴滾加強環機

Automatic Vertical Beading Machine

S-B17V自動立式罐胴滾加強環機採用直立式設計使其能與自動封罐機直接連線作業。反邊罐身由分罐螺桿及罐身轉盤帶入由滾環小輪伸入罐身內，滾環小輪藉由偏心軸之偏心作用靠向一只固定之弧型外輪對罐身壁擠壓成型。浸油式自動循環潤滑系統及多重安全設計，使維修保養容易且換型簡便快速。


S-B17V Automatic Vertical Beading Machine with vertical design is easily linked and work together with automatic double seamer. Flanged can body is carried by a timing screw and a turret to let beading roller enter can inside. Bead clusters are created due to pressing between beading roller and a fixed arc beading rail. With recycleable centralized lubricating system and multiple safety devices, easy for maintenance and can size changeover.

S-B17V

Certified by

ISO-9001

Quality Assurance System

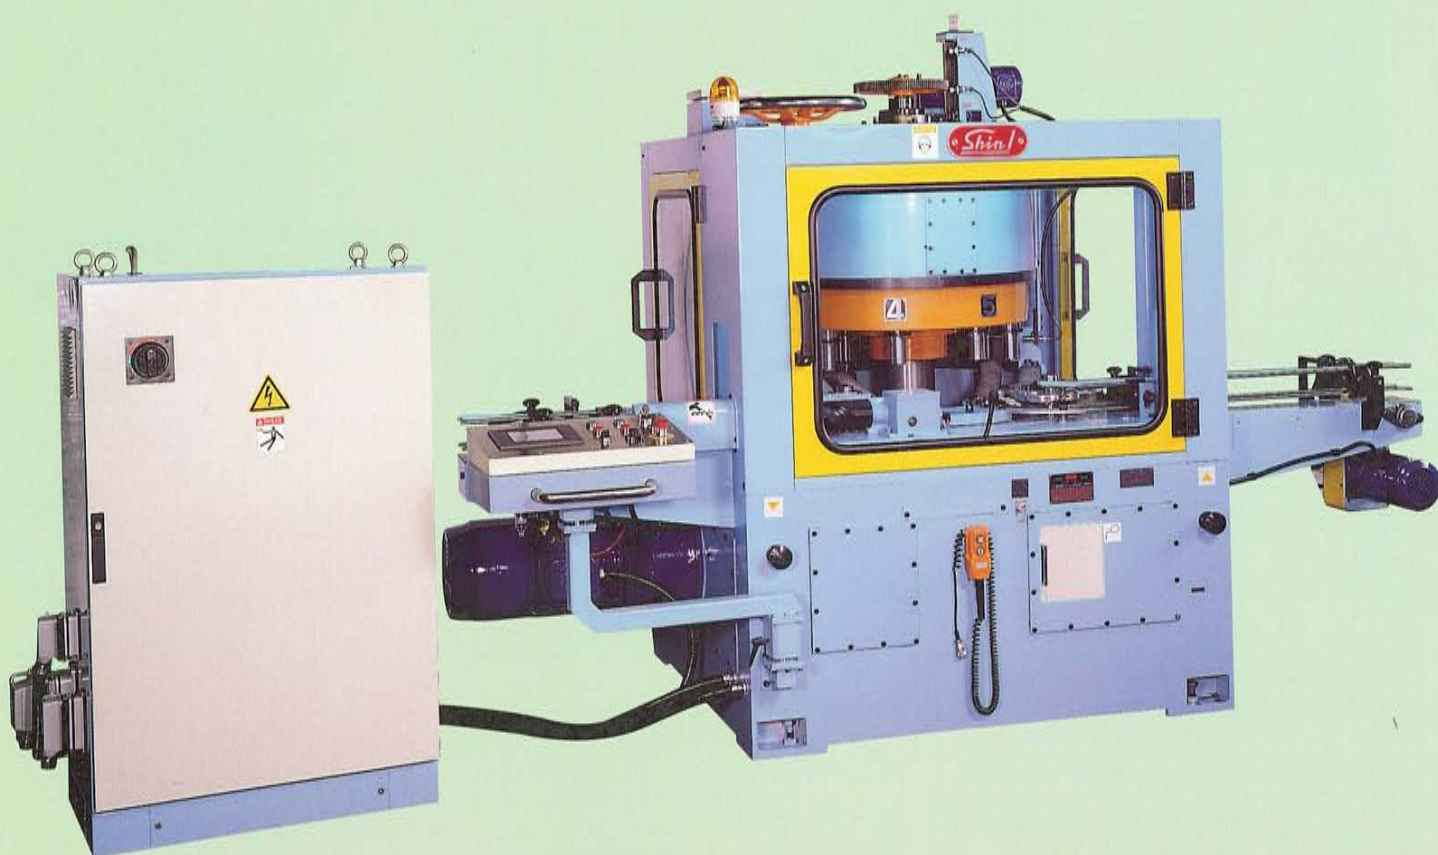

新益機械工廠股份有限公司
SHIN I MACHINERY WORKS CO., LTD.

自動立式罐胴滾加強環機

Automatic Vertical Beading Machine


特點：

- 直立式入出罐，可直接與封罐機連接作業。
- 裝置可循環式集中潤滑系統，保養方便。
- 使用人機介面（觸控螢幕）控制系統及變頻器作設定及無段變速控制。
- 與罐身接觸面均硬鉻處理或使用乙稀龍，防止擦傷。
- 全機自動控制系統能配合客戶全線自動化需要。
- 安全設計完善，確保機台及人員安全。
- 罐高調整由馬達帶動，換型容易。



Feature:

- Vertical design easy to connect with auto double seamer.
- Recycleable central control lubricating system.
- Use human-machine interface (touchable screen) control system and inverter for set up and variable speed control.
- Can guide and Turrets with hard chromium plating or Nylon material.
- Full Automatic Control system for Can making line requirement.
- Multi-safety design for machine and personnel safety.
- Can height adjustment driven by motors, easy for changeover.

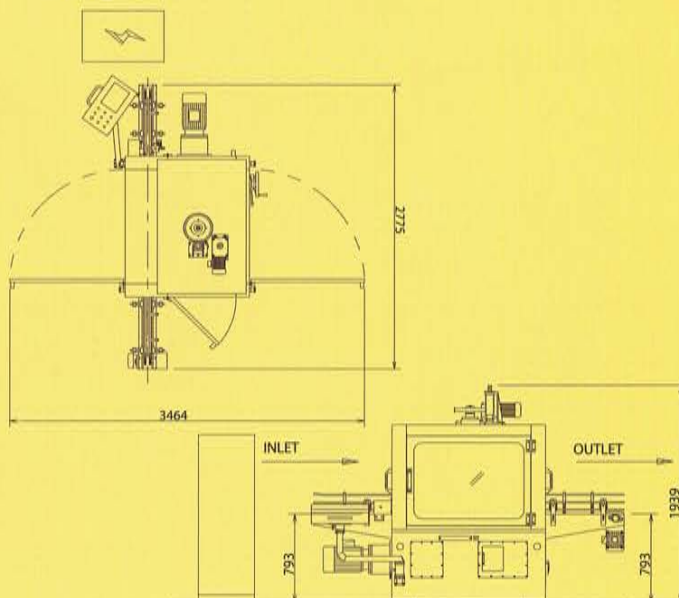

規格 SPECIFICATIONS:

機 型 MACHINE TYPE	4H	8H	12H	18H
適 用 罐 徑 Range of Can Dia.	202~401D	202~401D	202~401D	202~301D
適 用 罐 高 Range of Can Height	90~210 mm	90~210 mm	90~180 mm	90~180 mm
每 分 鐘 產 能 Capacity per minute	*Up to 300 CPM	*Up to 600 CPM	*Up to 900 CPM	*Up to 1200 CPM
需 要 馬 力 Horse Power Required	3 HP	3 HP	7.5 HP	7.5 HP
安裝面積及高度 Floor Space Overall Height	2775Lx3465Wx1940H mm	2775Lx3465Wx1940H mm	2975Lx3665Wx1940H mm	2975Lx3665Wx1940H mm
淨 重 Net Weight(approx)	4500 kgs	4800 kgs	5500 kgs	6200 kgs

如有變更，不另通知 Subject to change, without notice.
 ※實際產能視罐型而定 Capacity depending on can size.

新益機械工廠股份有限公司
 SHIN-I MACHINERY WORKS CO., LTD.

台灣省台中縣清水鎮清水里中正街43號
 NO.43 CHUNG-CHENG STREET, CHING SHUI, TAICHUNG, TAIWAN.
 TEL:886-(04)2623-8181 FAX:886-(04)2623-2129

Web address: <http://www.shinican.com>

E-mail: shinican@ms15.hinet.net

經銷商：
 AGENT：