

自動不規則罐真空封罐機

Automatic Irregular Can Vacuum Seamer

本機是配備特殊構造之四捲輪式捲封頭之不規則罐用自動真空封罐機，具備送蓋機構、罐身輸送機構及自動罐蓋打號機，並設置無進罐不送蓋裝置，每分鐘可捲封60罐堪稱為能力頗高之自動操作真空封罐機。


This machine is specialized for vacuum closing irregular cans which are rectangular square, or oval in shape. With newly designed seaming head, it can close cans up to 60 cans per minute. A lid marker is equipped on cover feeder to save labor. No can no cover system is adopted to make sure efficiently and smoothly running.

S-C25A

Certified by

ISO-9001

Quality Assurance System

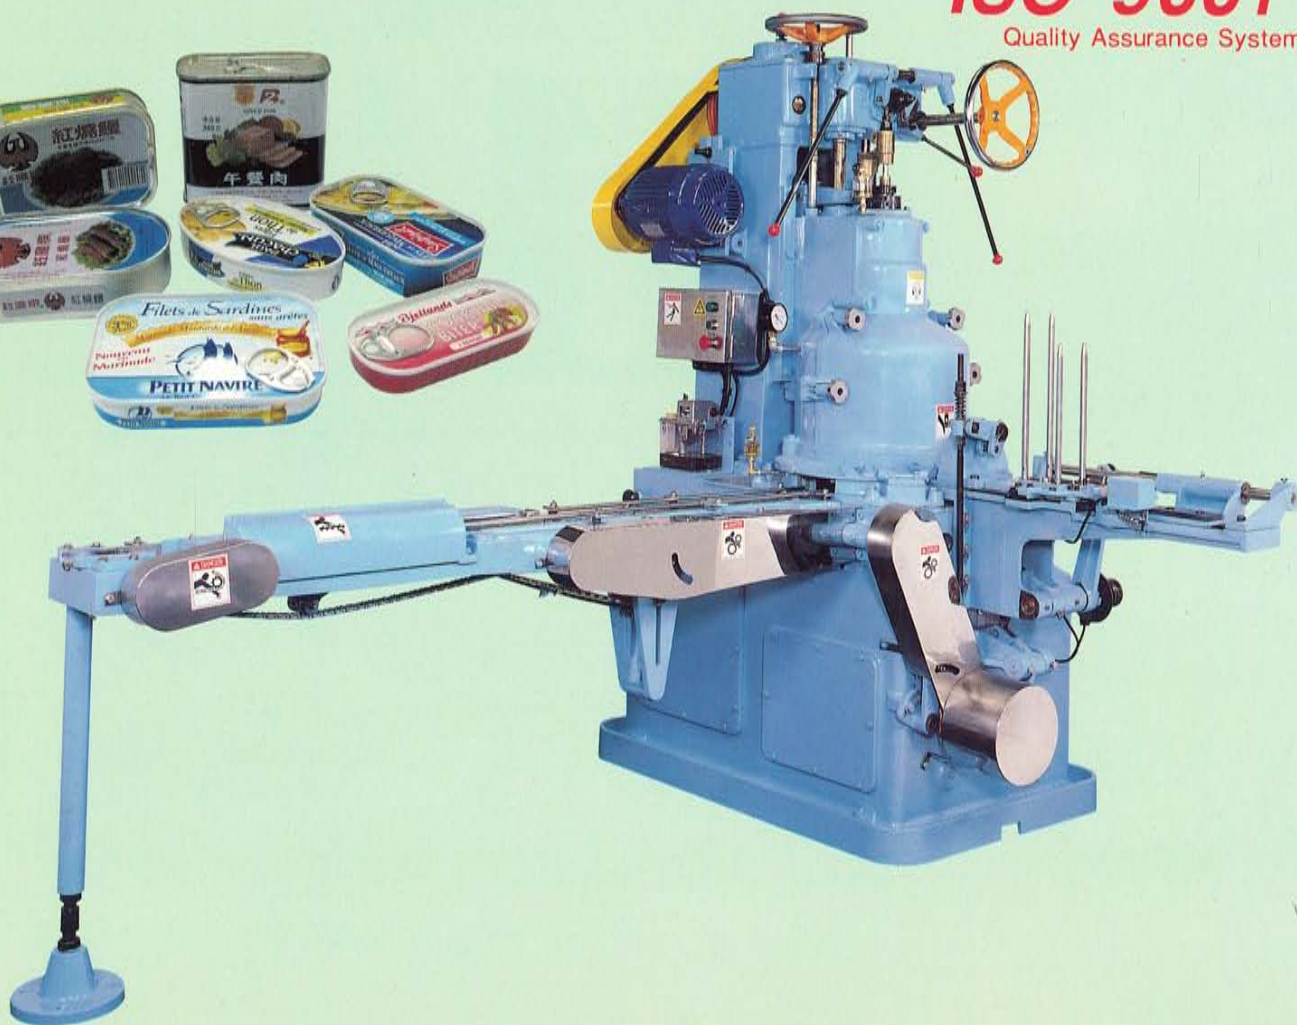

Shin-I
新益



新益機械工廠股份有限公司
SHIN-I MACHINERY WORKS CO., LTD.

自動不規則罐真空封罐機

Automatic Irregular Can Vacuum Seamer

特點：

- 送蓋機構和罐身輸送機構分開配置，操作方便。
- 附設自動罐蓋打號機，可免設一部打號機又可減少人工。（打號裝置為選配）
- 捲封滾輪用獨立凸輪控制進退，捲封均勻容易調整。
- 捲封頭結構精巧輕便，操作容易檢修迅速。
- 無罐無蓋機構。

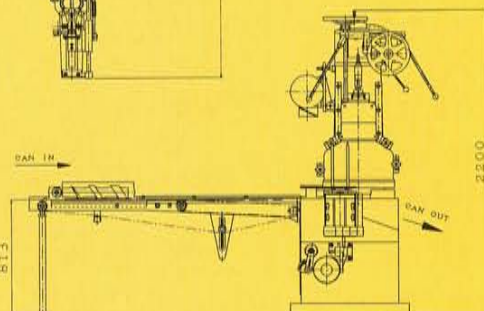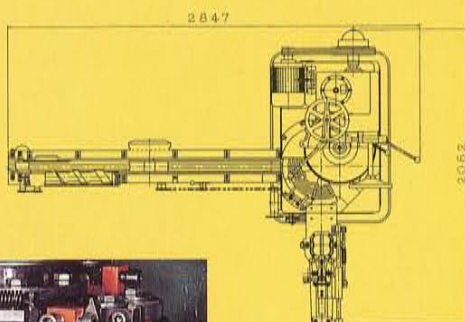

規格 (Specifications):

機 型	MACHINE TYPE	S-C25A
適 用 罐 身	Range of can demension	45~100 mm length, width
適 用 罐 高	Range of can height	18~100 mm
最大罐對角線	Maximun can diagonal	Up to 130 mm
真空轉盤孔數	No. of pocket on vacuum turrret	8
每 分 鐘 產 能	Capacity per min	Up to 60 cpm, depending on can shape, size
需 要 馬 力	Horse power required	
主 馬 達	Main motor	3 HP
真 空 泵 馬 達	Vacuum pump	7 1/2 HP
安裝面積及高度	Floor space overall height	2847L x 2062W x 2200H mm
淨 重	Net weight (approx)	2200 kgs

※規格如有變更，恕不另通知 Subject to change without notice.

新益機械工廠股份有限公司
SHIN-I MACHINERY WORKS CO., LTD.

台灣省台中縣清水鎮清水里中正街43號
NO.43 CHUNG-CHENG STREET, CHING SHUI, TAICHUNG, TAIWAN.
TEL:886-(04)2623-8181 FAX:886-(04)2623-2129

Web address: <http://www.shinican.com>

E-mail: shinican@ms15.hinet.net

經銷商：
AGENT：